


DFF1 MODE Switch settings

(For connection to NavNet 1, VX2 & NN3D)

The DFF1 comes defaulted to work with NN1, vx2 and NN3D displays not using a HUB101. If you are connecting the DFF1 to a NavNet 3D system using the HUB101, please set the dip switches as shown below.

Please confirm the dip switch selection for your type of NavNet display. To access the dip switches, remove the rubber cap on the front of the DFF1 unit.

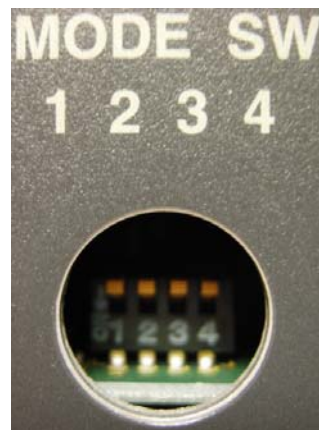

Factory Default DIP switch settings for NN1, VX2 & NN3D when using standard Hub.



Dip switch settings for NN3D when using HUB101.

If you have more than one network sounder in the system, please contact Furuno Tech Support for setup information.