

DFF1 Connection to VX2

DFF1




For direct connection from a DFF1 to any single NavNet processor, (10.4", 7" or BB processor) use standard supplied 5 Meter RJ-45 to 6 pin cable, P/N 000-159-705. The following optional cables are also available:

- 1 Meter RJ-45 to 6 pin cable - 000-159-704
- 10 Meter RJ-45 to 6 pin cable - 000-159-706
- 20 Meter RJ-45 to 6 pin cable - 000-159-707
- 30 Meter RJ-45 to 6 pin cable - 000-159-708

DFF1



Locally Supplied Standard Ethernet
"Straight Through" Cable RJ-45 to RJ-45

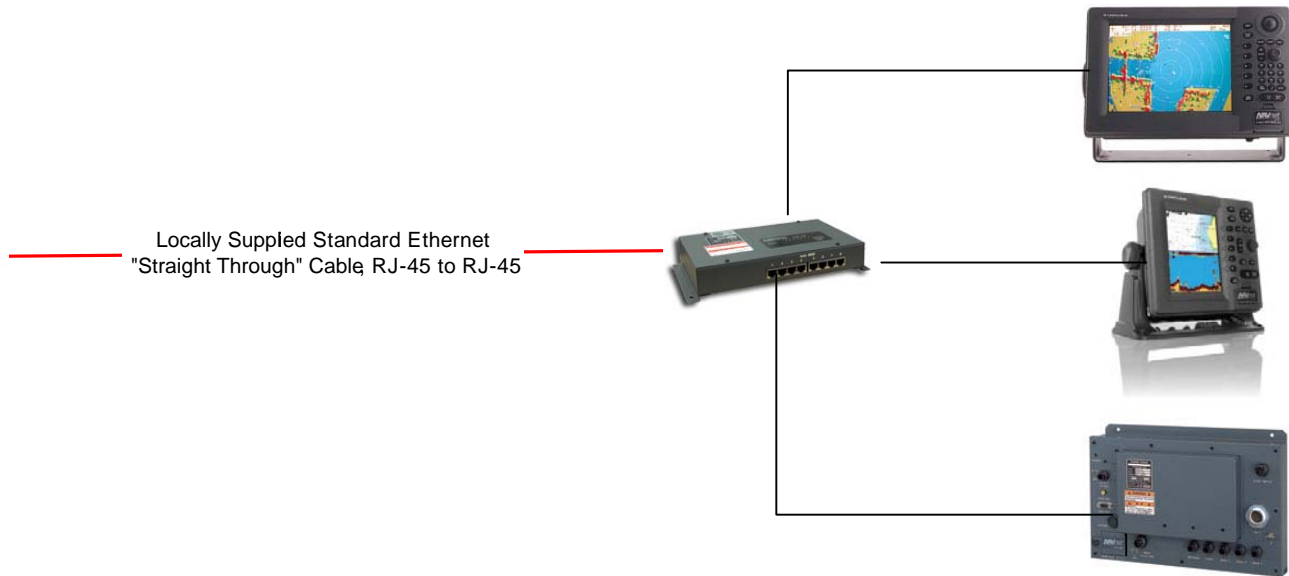

For connection from a DFF1 to a NavNet network, use a locally supplied RJ-45 to RJ-45 "straight Through" cable.