


Connecting the JAS-LC1-FFU Full Follow Up Jog Lever


To: Navpilot 700/711/720 series

Setup:

You will need to enter the Installation Menu by pressing and holding the MENU key and pressing the "ENTER" knob 3 times. This will display the menu below:

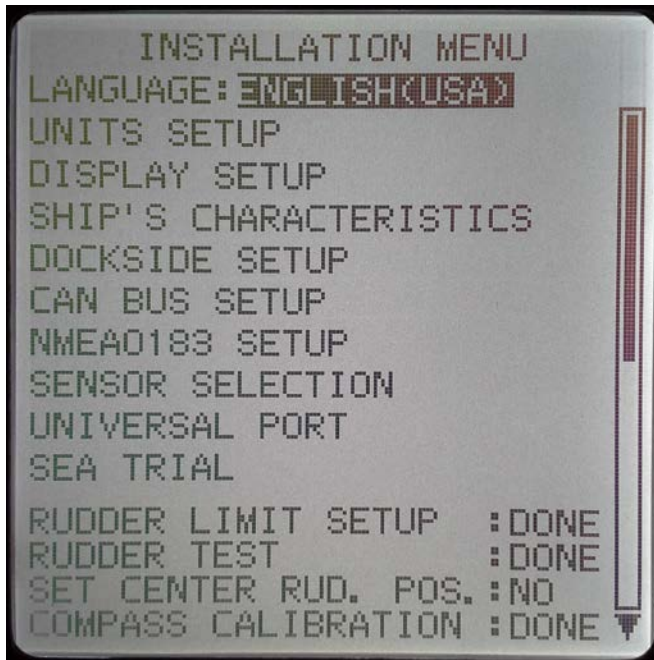


Scroll down past "SEA TRIAL" to Page 2:

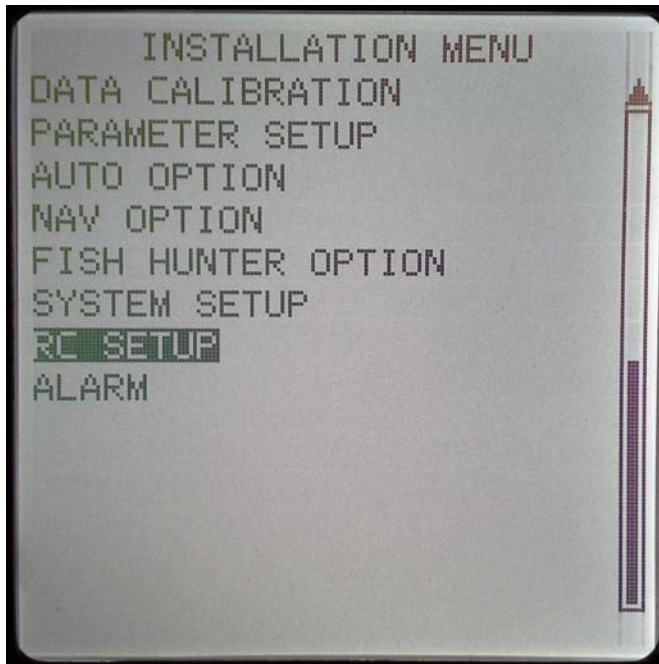


Select "RC SETUP" and press ENTER. You will see the following Menu screen:



Highlight "DISABLE" under REMOTE CONTROLLER 1 and press ENTER:

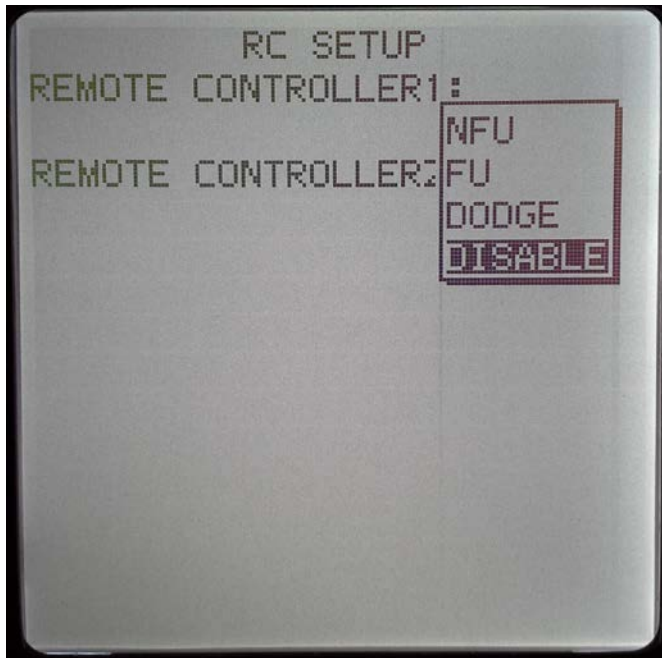

Scroll up and select "FU" from the list:

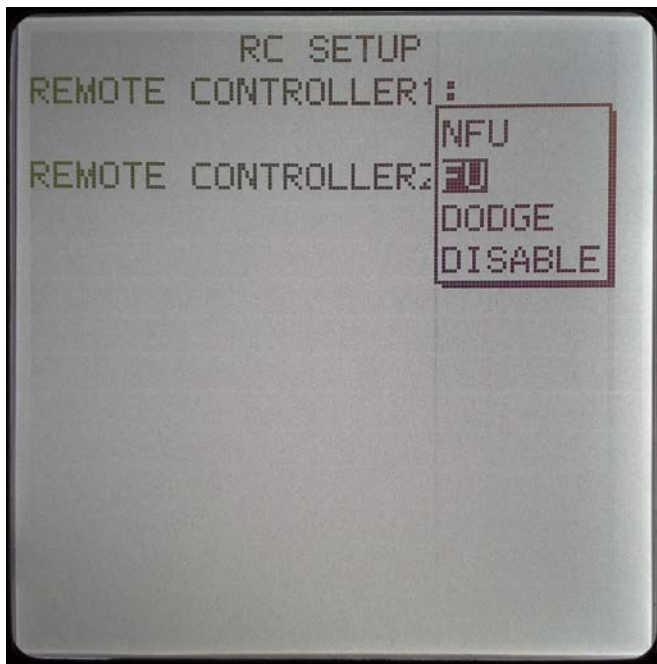


Press enter to set the selection to "FU":




WIRING:

The wiring for the Remote port is very simple and similar to the Navpilot 500/511/520 series. The wiring is shown below:

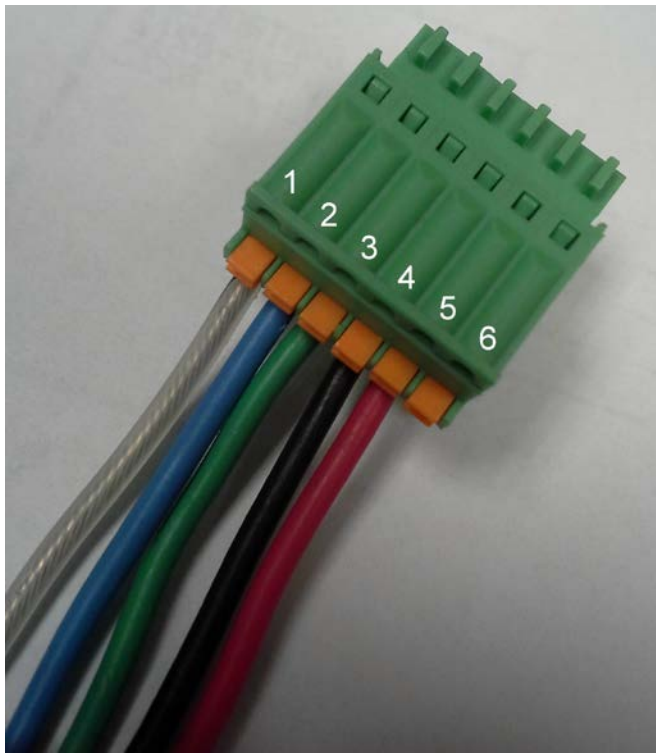

Port Connection (TB13):

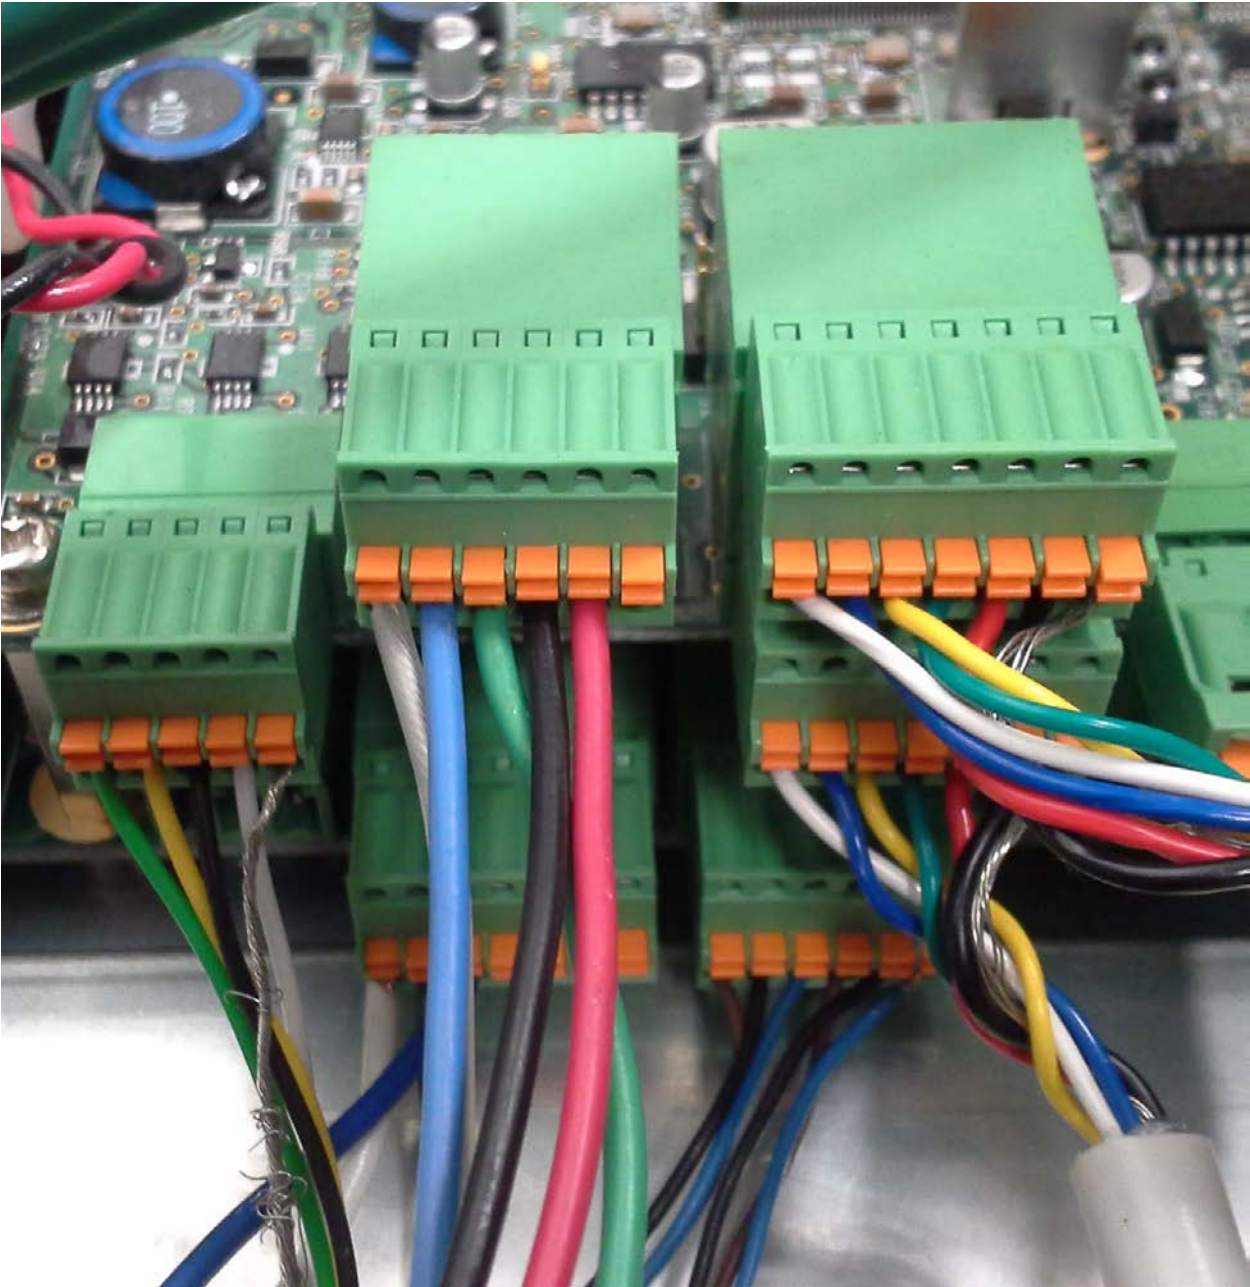

Connection Diagram:

