

- HOW TO -

Installing the new RD33 Color display in place of your existing RD30 & NMEA 0183 Smart Sensor

EXISTING RD30 DISPLAY WITH NMEA 0183 SMART SENSOR

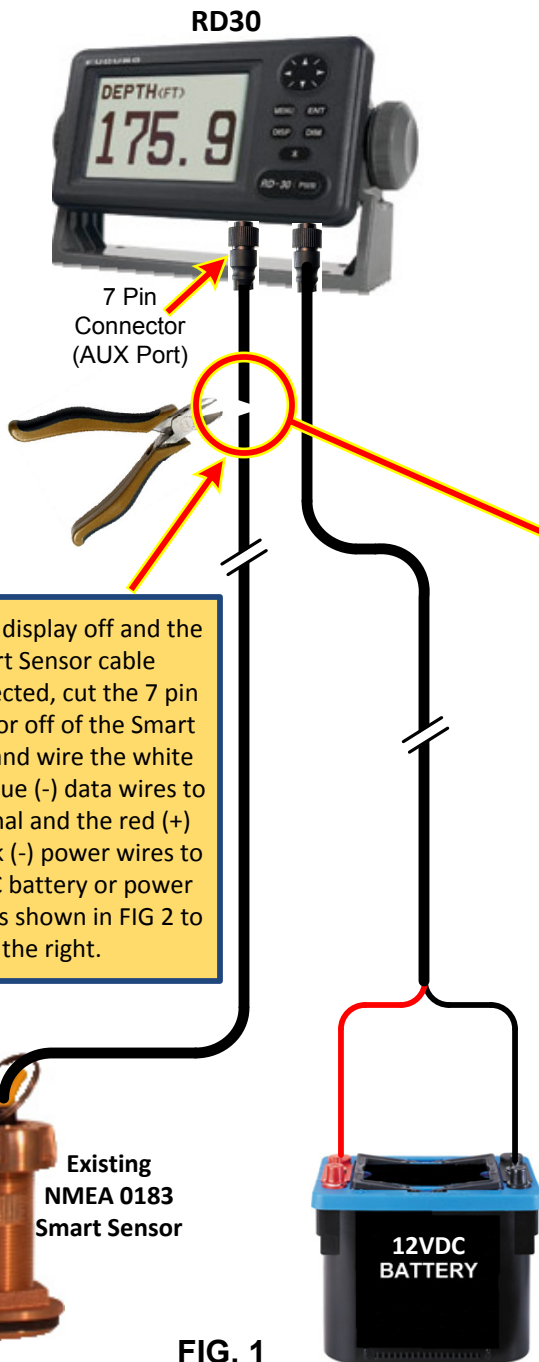


FIG. 1

NEW RD33 DISPLAY WITH NMEA 0183 SMART SENSOR

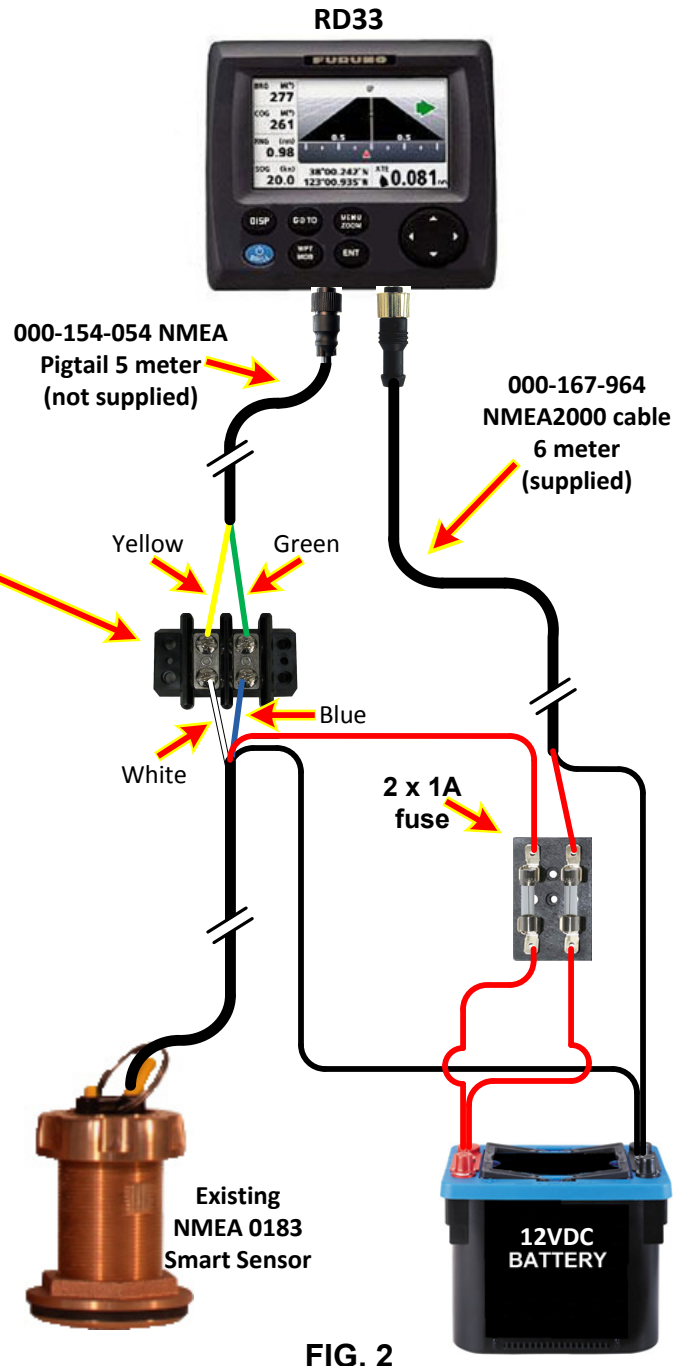


FIG. 2

With the display off and the Smart Sensor cable disconnected, cut the 7 pin connector off of the Smart Sensor and wire the white (+) and blue (-) data wires to a terminal and the red (+) and black (-) power wires to a 12VDC battery or power source, as shown in FIG 2 to the right.