
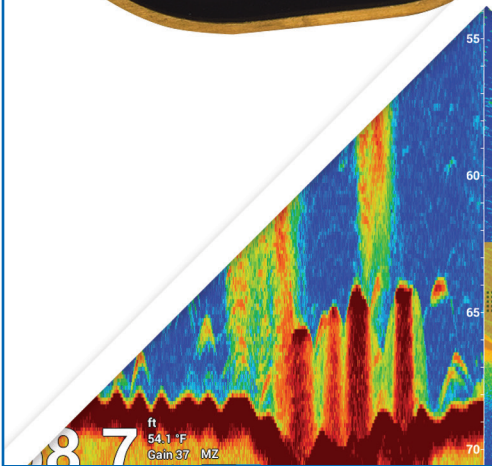
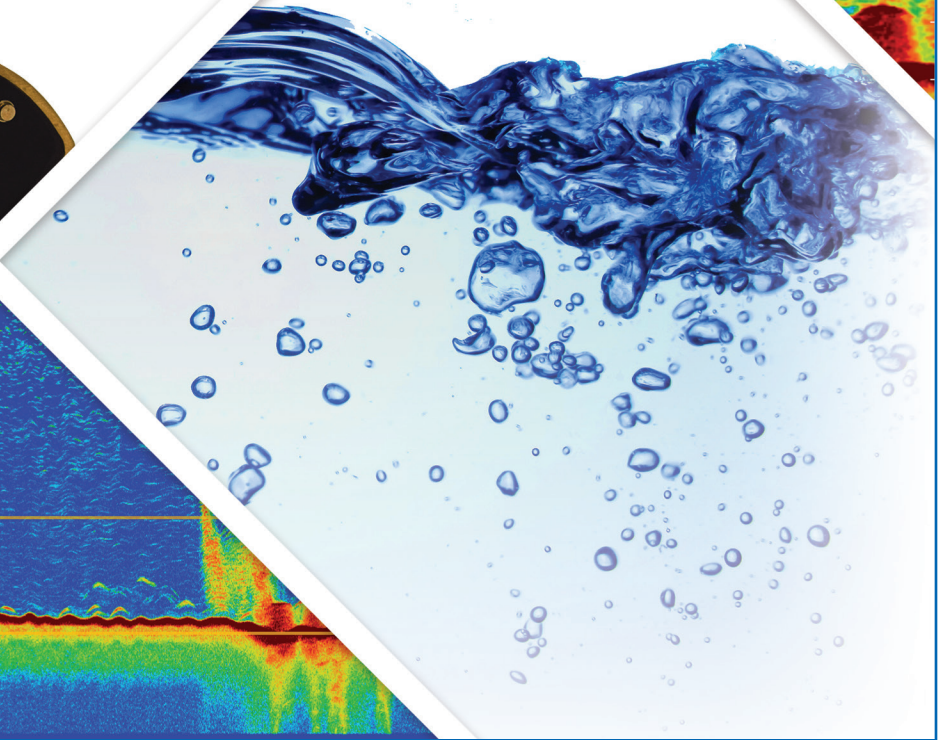
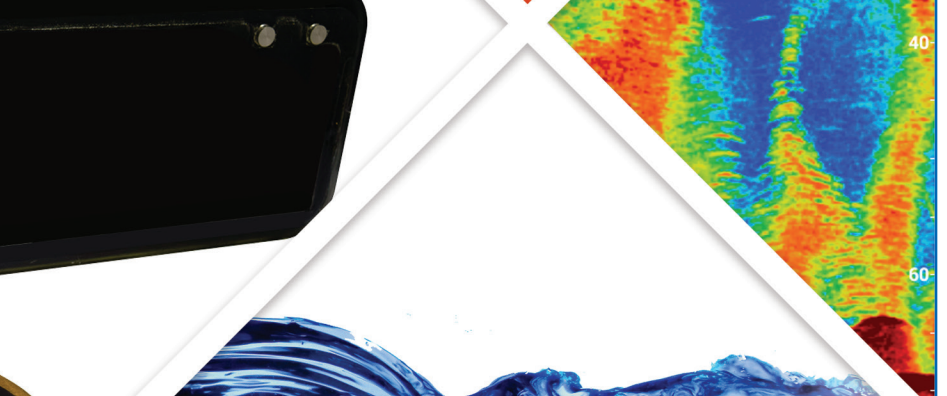
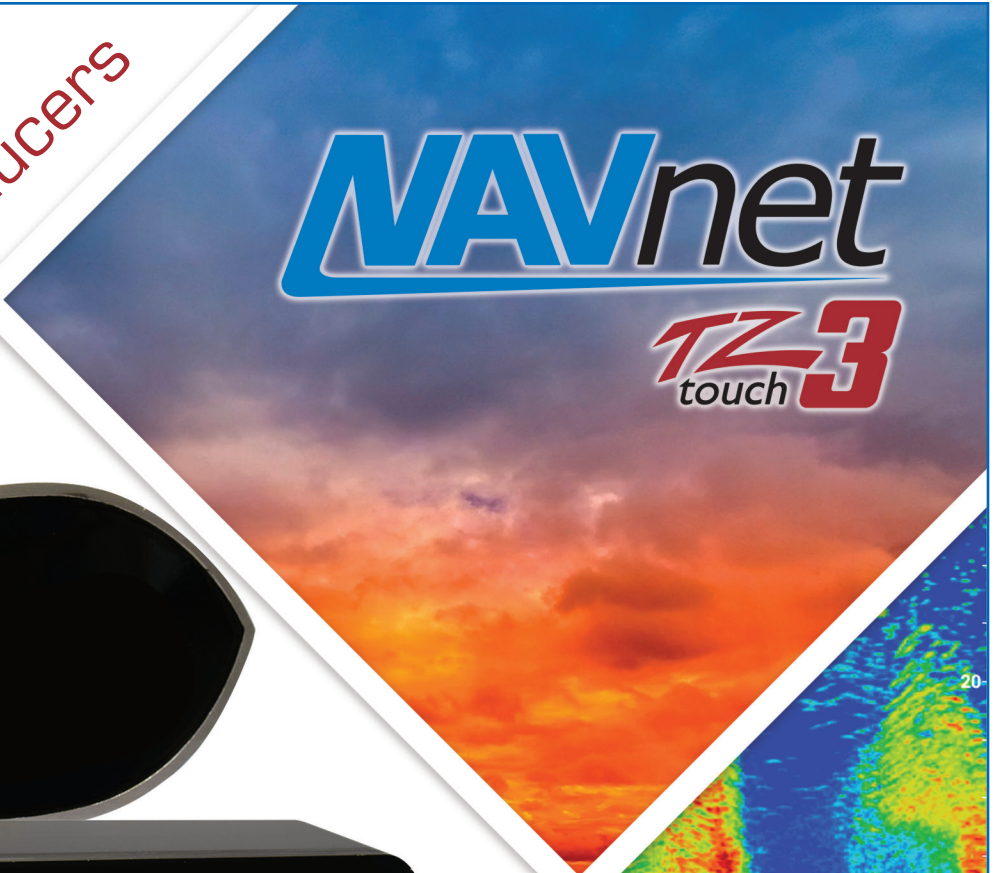


TZtouch3
Supported Transducers

NAVnet

TZ3
touch

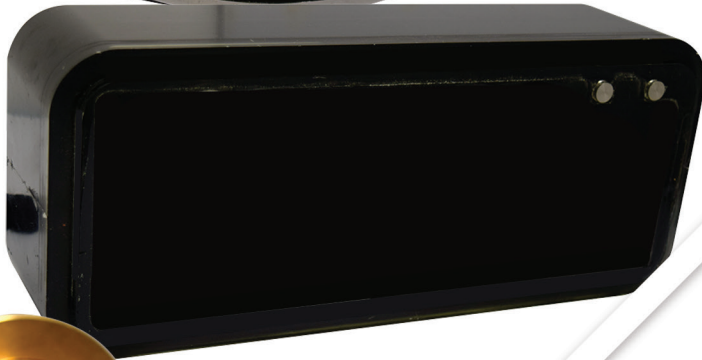

87
ft
54.1 °F
Gain 37 MZ

FURUNO

TZT12F/16F/19F

Supported CHIRP Transducers

If your transducer is not listed; it still might be compatible – Contact Technical Support

300W:B75L	1kW:B175M	1kW:TM275LHW
300W:B150M	1kW:B175MUW	<i>Transducer Pairs Using Optional</i>
300W:P95M	1kW:B175HW	<i>Y cable, shown below:</i>
300W:SS75L	1kW:B285HW	300W:B150M & 300W:B75L
300W:TM150M	1kW:B285M	600W:B75M & 300W:B75L (B765LM)
600W:B75H	1kW:TM185HW	600W:B75H & 300W:B75L (B765LH)
600W:B75HW	1kW:TM185M	600W:SS75M & 300W:SS75L
600W:B75M	1kW:B265LH	600W:SS75H & 300W:SS75L
600W:B785M	1kW:B265LM	1kW:B175M & 1kW:B175L
600W:P75M	1kW:B275LHW	1kW:B175M & 1kW:B175HW
600W:SS75H	1kW:CM265LH	1kW:B175M & 1kW:B175L
600W:SS75M	1kW:CM265LM	1kW:B175H & 1kW:B175L
600W:TM165HW	1kW:CM275LHW	1kW:B175HW & 1kW:B175L
1kW:B175H	1kW:TM265LH	
1kW:B175L	1kW:TM265LM	

TZT12F/16F/19F

Supported CW Transducers

(Fixed 50kHz/200kHz)

If your transducer is not listed; it still might be compatible – Contact Technical Support

600W:520-5MSD

600W:525-LTD/20(B60-20)

600W:520-5PSD

600W:525T-PWD(P66)

600W:520-PLD(P319)

600W:SS60-SLTD/12(SS60-12)

600W:525-5PWD

600W:SS60-SLTD/20(SS60-20)

600W:525STID

1kW:526TID-HDD(B260)

600W:525STID-MSD(B744V)

1kW:50/200-1T

600W:525STID-PWD(P66)

1kW:50B-6/6B

600W:525T-BSD(B45)

Tranducer pair below would require MB1100 Matching Box

600W:525T-LTD/12(B60-12)

1kW:50B-6/6B & 200B-5S

TZT12F/16F/19F

Supported Transducers with DI-FFAMP

If your transducer is not listed; it still might be compatible – Contact Technical Support

2kW/2kW:PM111LH

3kW/2kW:R509LH

3kW:38BL-15HR

2kW/1kW:PM111LHW

3kW/1kW:R509LHW

3kW:68F-30H

2kW/2kW:PM111LM

3kW/2kW:R509LM

5kW:200B-12H

2kW/2kW:PM411LWM

3kW/2kW:R599LH

3kW:28BL-12HR

2kW/2kW:R109LH

3kW/2kW:R599LM

3kW:38BL-15HR

2kW/1kW:R109LHW

2kW:200B-8/8B

3kW:68F-30H

2kW/2kW:R109LM

2kW:28BL-6HR

5kW:28F-38M

2kW/2kW:R111LH

2kW:38BL-9HR

5kW:200B-12H

2kW/2kW:R111LM

2kW:50BL-12HR

5kW:28F-38M

2kW/2kW:R409LWM

3kW:50BL-24HR

5kW:50F-38

2kW/2kW:165T-PM542LHW

2kW:82B-35R

5kW:88F-126H

2kW/2kW:165T-PM542LM

2kW:88B-10

10kW:28F-72

3kW/2kW:CM599LH

3kW:100B-10R

10kW:50F-70

3kW/1kW:CM599LHW

3kW:150B-12H

3kW/2kW:CM599LM

3kW:28BL-12HR

TZT9F

Supported CHIRP Transducer List

If your transducer is not listed; it still might be compatible – Contact Technical Support

300W:B75L	1kW:B175M
300W:B150M	1kW:B175MUW
300W:P95M	1kW:B175HW
300W:SS75L	1kW:B285HW
300W:TM150M	1kW:B285M
600W:B75H	1kW:TM185HW
600W:B75HW	1kW:TM185M
600W:B75M	600W:SS75M
600W:B785M	600W:TM165HW
600W:P75M	1kW:B175H
600W:SS75H	1kW:B175L
300W:B75L	1kW:B175M
300W:B150M	1kW:B175MUW

B175MUW should be selected when using an AIRMAR (B185MW)

TZT9F

Supported CW Transducer List

(Fixed 50kHz/200kHz)

If your transducer is not listed; it still might be compatible – Contact Technical Support

600W:520-5MSD

600W:525-LTD/20(B60-20)

600W:520-5PSD

600W:525T-PWD(P66)

600W:520-PLD(P319)

600W:SS60-SLTD/12(SS60-12)

600W:525-5PWD

600W:SS60-SLTD/20(SS60-20)

600W:525STID

1kW:526TID-HDD(B260)

600W:525STID-MSD(B744V)

1kW:50/200-1T

600W:525STID-PWD(P66)

1kW:50B-6/6B

600W:525T-BSD(B45)

Transducer pair below would require MB1100 Matching Box

600W:525T-LTD/12(B60-12)

1kW:50B-6/6B & 200B-5S